

RetroSound® Apache 1954-59 Chevrolet Truck Radio



The RetroSound® Apache Series is the most technologically-advanced radio ever made for your classic 1954-59 Chevy truck. This is the only Made-For-iPod® radio for your vintage Chevy truck, and also the only with built-in Bluetooth® connectivity for hands-free phone calls and wireless audio streaming. The new Apache features a 32,000 color display to customize your radio to your truck's interior. Two USB ports for iPod®/iPhone® or flash drives plus two standard auxiliary inputs are included. The Apache has a built-in 25 watts x 4 channel MOSFET power amplifier as well as front and rear RCA pre-outs, plus subwoofer output, to add external amplifiers. It mounts seamlessly into your Chevrolet truck thanks to RetroSound's patented InfiniMount adjustable bracket system.

- Fits 1954-59 Chevrolet Apache Series Trucks
- Made-For-iPod®/iPhone®
- Built-in Bluetooth® connectivity
- 32,000 color display
- AM/FM RDS tuner with 30 pre-sets
- Two rear-mounted USB ports for iPod®/iPhone® or USB flash drive
- Two auxiliary inputs for portable devices

- 25 watts x 4 channel RMS MOSFET power amplifier
- Dual RCA pre-outs plus subwoofer output for external amplifiers
- Patented InfiniMount adjustable shaft system




The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Raino Manufacturing, LLC is under license. Other trademarks and trade names are those of their respective owners.



iPod and iPhone, are trademarks of Apple Inc., registered in the U.S. and other countries.

SPECIFICATIONS

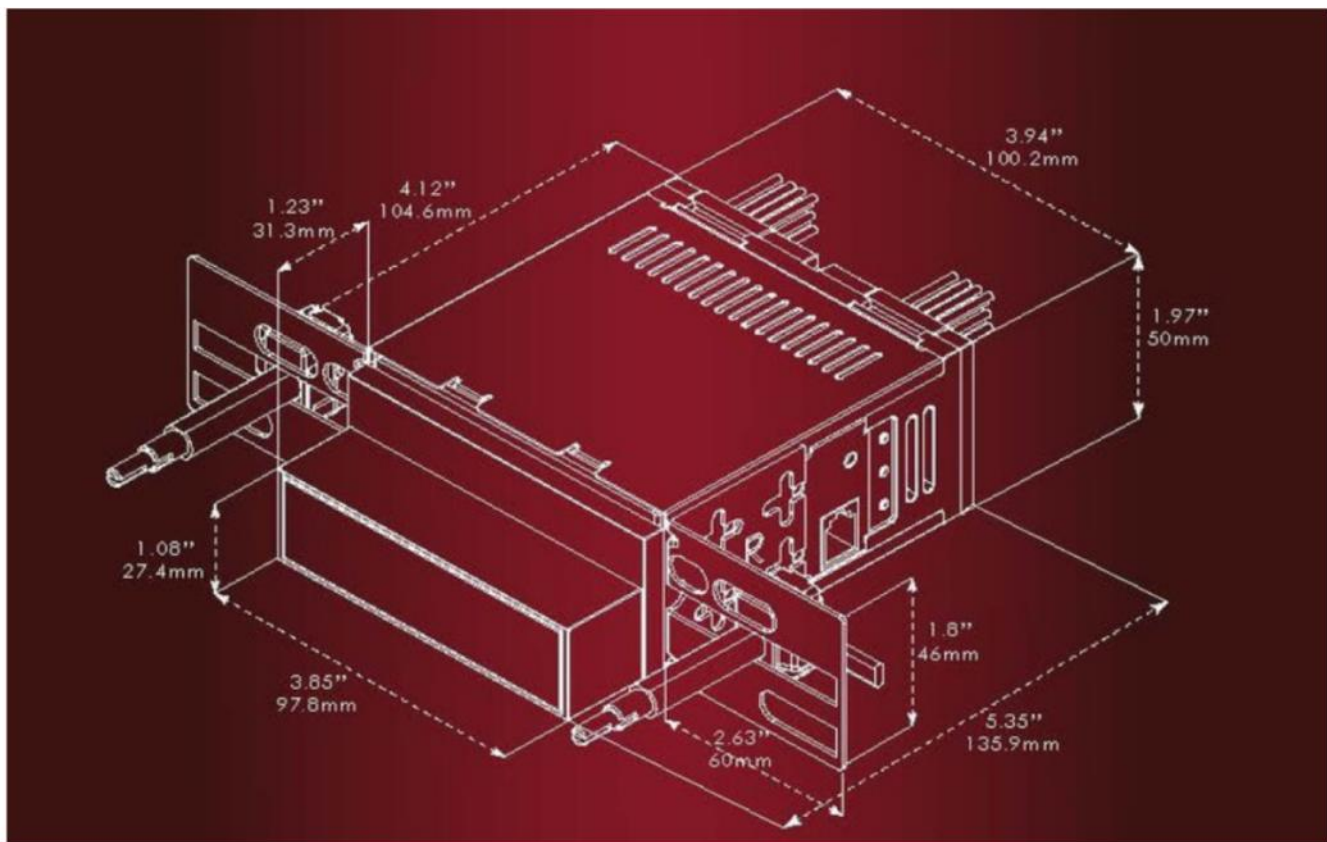

FM

Tuning Range (USA, EUR, AUS, JAP, RUS tuning capable) with RDS	87.5-107.9MHz
Antenna Terminal	External Antenna Connector
Usable Sensitivity	12.5 dBf
Selectivity	75 dB @ 400kHz
Signal to Noise Ratio	62 dB (Stereo), 67 dB (mono)
Harmonic Distortion @ 1 kHz	0.8% (stereo), 0.5% (mono)
Separation	32 dB @ 1kHz

Frequency Response	30-16,000 Hz
--------------------	--------------

AM (EU and US Tuning Capable)

Tuning Range (USA, EUR, AUS, JAP, RUS tuning capable)	530-1710 kHz
---	--------------

Antenna Terminal	External Antenna Connector
------------------	----------------------------

General

Dimensions (radio body)	3.96"W x 1.98"H x 4.30"D
-------------------------	--------------------------

Power Requirements	10.5-14.4 volts
--------------------	-----------------

Current Consumption (during operation)	Max. 15A
--	----------

Current Consumption (car off)	<3.5 mA
-------------------------------	---------

Output Power (@ 14.4 volts @ 4 ohm @ 1% THD)	25x4 watts RMS 45x4 Max Power
--	-------------------------------

Output Impedance	4-8ohm
------------------	--------

Low Level Output (4 channels)	2.85 volts
-------------------------------	------------

AUX 1 Input (AUX cable length, 8")	>300 mV / 6 k Ω
------------------------------------	------------------------

AUX 2 Input (AUX cable length, 8")	>300 mV / 6 k Ω
------------------------------------	------------------------

USB 1 Input	(USB cable length, 40") 5V (USB female input)
-------------	---

USB 2 Input (USB cable length, 40")	5V (USB female input)
-------------------------------------	-----------------------