


RetroSound® Monterey Radio

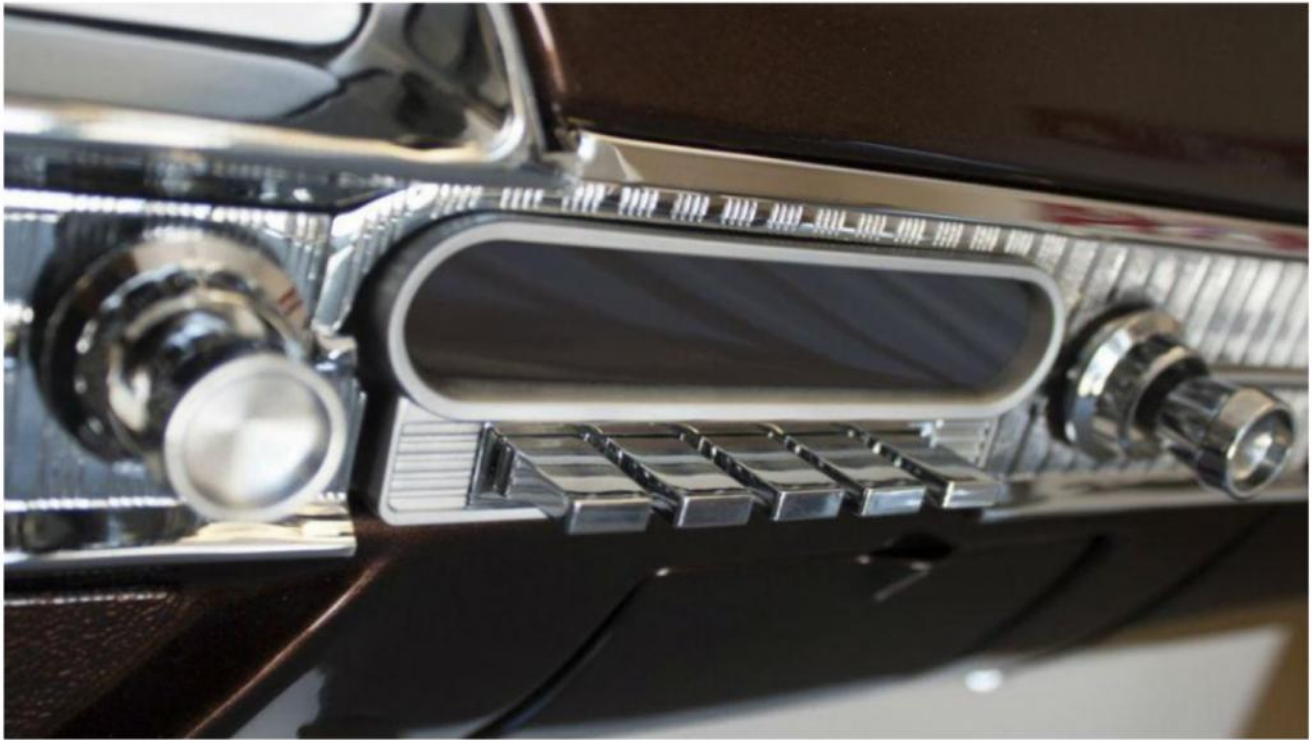

RetroSound®'s Monterey is the most technologically-advanced radio ever made for your classic. The Monterey is SiriusXM-Ready™ and connects to the SiriusXM™ SXV300 Connect Vehicle Tuner (sold separately, subscription required). The SXV300 plugs directly into the Monterey without the need for special adapters or cables. The compact size installs easily and discreetly behind the dash for a fully integrated look.

Monterey is Made-For-iPod®/iPhone®, and also features built-in Bluetooth® connectivity for hands-free phone calls and wireless audio streaming. It features a 32,000 color display to customize your radio to your vehicle's interior. Two USB ports for iPod®/iPhone® or MP3/WMA music files plus two standard auxiliary inputs are included.

Monterey has a built-in 25 watts x 4 channel power RMS MOSFET amplifier as well as front and rear RCA pre-outs, plus subwoofer output, to add external amplifiers. It mounts seamlessly into your dash, with no additional faceplates or bezels needed. Monterey is available with either chrome or black push-buttons.

- Made-For-iPod®
- Built-in Bluetooth® for hands-free phone operation and wireless streaming
- SiriusXM™-ready (SXPL1V1 tuner and subscription required)
- Push button styling for an authentic "retro" look
- Enhanced 32,000 color LCD display

- Two rear mounted USB ports allow playback of Mp3 and WMA digital music files
- Two rear mounted auxiliary inputs for portable devices
- 25 watts x 4 RMS / 45 watts x 4 peak power output
- AM/FM RDS tuner with 30 presets
- Two sets of RCA low level outputs plus subwoofer output
- 3 EQ presets / loudness control

Note: Bezels, knobs, faceplates, and replacement parts are non-returnable. If you are not sure as to fitment, please **contact us**.

SPECIFICATIONS

FM

Tuning Range (USA, EUR, AUS, JAP, RUS tuning capable) with RDS	87.5-107.9MHz
Antenna Terminal	External Antenna Connector
Usable Sensitivity	12.5 dBf
Selectivity	75 dB @ 400kHz
Signal to Noise Ratio	62 dB (Stereo), 67 dB (mono)
Harmonic Distortion @ 1 kHz	0.8% (stereo), 0.5% (mono)
Separation	32 dB @ 1kHz
Frequency Response	30-16,000 Hz

AM (EU and US Tuning Capable)

Tuning Range (USA, EUR, AUS, JAP, RUS tuning capable)	530-1710 kHz
Antenna Terminal	External Antenna Connector

General

Dimensions (radio face & push-buttons only)	3.5"W x 1.5" H x 1.05" D
Dimensions (radio body)	3.96"W x 1.98"H x 4.30"D
Power Requirements	10.5-14.4 volts
Current Consumption (during operation)	Max. 15A
Current Consumption (car off)	<3.5 mA
Output Power (@ 14.4 volts @ 4 ohm @ 1% THD)	25x4 watts RMS 45x4 watts Max Power
Output Impedance	4
Low Level Output (4 channels)	2.85 volts
AUX 1 Input	>300 mV / 6 kΩ
AUX 2 Input	>300 mV / 6 kΩ
USB 1 Input	5V (USB female input)
USB 2 Input	5V (USB female input)